


TW BT 01 - Barstock Threaded Type Thermowell (Straight)

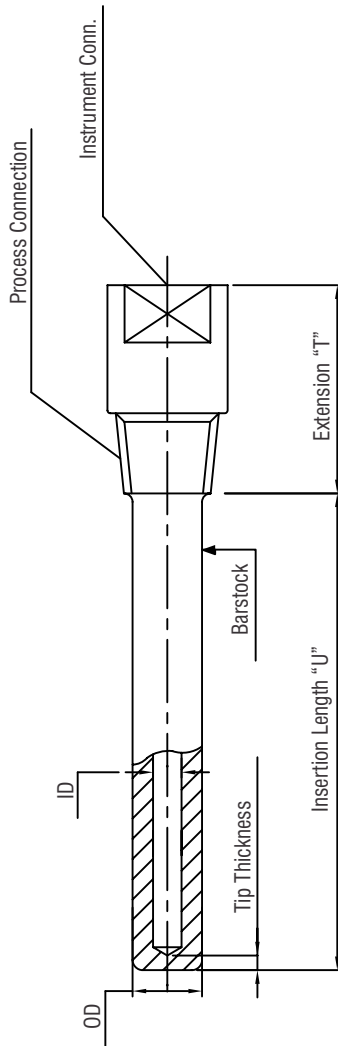

TWBT - 01

S4S	SS304	825	Incoloy® 825
S6S	SS316	600	Inconel® 600
310	SS310	800	Incoloy® 800
446	SS446	321	SS321
S4L	SS304L	KAN	Kanthal
S6L	SS316L	HCC	Hastelloy® C-276
CST	CS	HCB	Hastelloy® B
410	SS410	MN4	Monel® 400
S7S	SS317	MN5	Monel® 500
S7L	SS317L	Ti2	Ti-II
N20	Nickel 200		
**Special material on Request			

Thermowell Material

Thermowell Head Dia

Thermowell OD

Bore ID

Instrument Connection

Process Connection

Insertion Length ("U")

Extension Length ("T")

Tip Thickness

Pl. Specify in mm*

Pl. Specify in mm

Pl. Specify in mm

THREADED - T					
Size	Code	Type	Code	M / F	Code
1/4"	06	NPS	NS	M	M
3/8"	10	NPT	NT	F	F
1/2"	15	BSP	BP		
3/4"	20	BSPT	BT		
1"	25	JIS-PF	PF		
1-1/2"	40	JIS-PT	PT		
2"	50	Gas	GS		
M20	M20	R	RR		
M24	M24	Rp	RP		
M27	M27	Pitch 1.5	C		
M33	M33	Pitch 2	D		

Pl. Specify in mm

Pl. Specify in mm


Pl. Specify in mm

Other Options	
0	None
1	Plug & Chain
2	IBR
3	Radiography Test (RT) for Bore Concentricity
4	Ultrasonic Test (UT) for Bore Concentricity
5	NACE to MR-01-75/-MR-01-03

* for Hexagonal Head, please specify the AF size in mm e.g. code: HEX36AF

Ordering Example:- TWBT01-S6S-32-18-11-T15NTF-T20BPM-250-50-5-2

TW BT 02 - Barstock Threaded Type Thermowell (Taper)

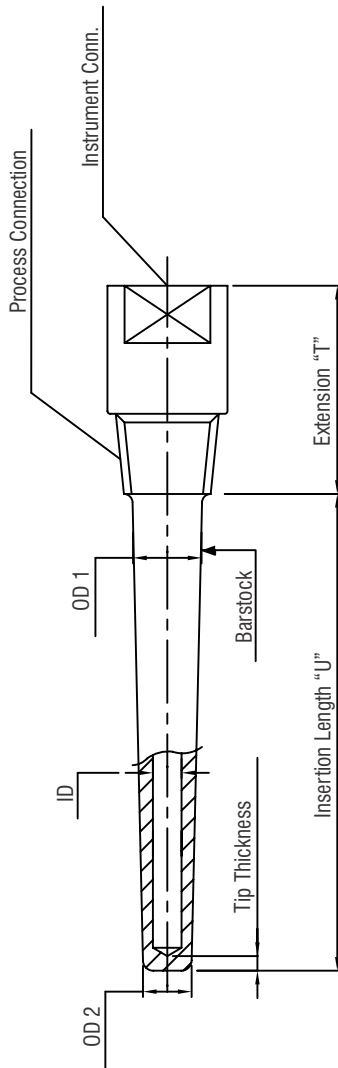

Other Options	
0	None
1	Plug & Chain
2	IBR
3	Radiography Test (RT) for Bore Concentricity
4	Ultrasonic Test (UT) for Bore Concentricity
5	NACE to MR-01-75/-MR-01-03
19	Tapered for tail portion only (Pl. Specify length in mm)

TWBT - 02

S4S	SS304	825	Incoloy [®] 825
S6S	SS316	600	Inconel [®] 600
310	SS310	800	Incoloy [®] 800
446	SS446	321	SS321
S4L	SS304L	KAN	Kanthal
S6L	SS316L	HCC	Hastelloy [®] C-276
CST	CS	HCB	Hastelloy [®] B
410	SS410	MN4	Monel [®] 400
S7S	SS317	MN5	Monel [®] 500
S7L	SS317L	TI2	Ti-II
N20	Nickel 200		
**Special material on Request			

Thermowell Material

Thermowell Head Dia

Thermowell OD 1 (Cold End)

Thermowell OD 2 (Hot End)

Bore ID

Instrument Connection

Process Connection

Insertion Length ("U")

Extension Length ("T")

Tip Thickness

THREADED - T

Size	Code	Type	Code	M / F	Code
1/4"	06	NPS	NS	M	M
3/8"	10	NPT	NT	F	F
1/2"	15	BSP	BP		
3/4"	20	BSPT	BT		
1"	25	JIS-PF	PF		
1-1/2"	40	JIS-PT	PT		
2"	50	Gas	GS		
M20	M20	R	RR		
M24	M24	Rp	RP		
M27	M27	Pitch 1.5	C		
M33	M33	Pitch 2	D		

Pl. Specify in mm*

Pl. Specify in mm

Pl. Specify in mm

Pl. Specify in mm

Pl. Specify in mm

Pl. Specify in mm


Pl. Specify in mm

Pl. Specify in mm

* for Hexagonal Head, please specify the AF size in mm e.g. code: HEX36AF

Ordering Example:- TWBT02-S6S-HEX36AF-24-20-11-T15NTF-TM33DM-280-60-5-0

TW BT 03 - Barstock Threaded Type Thermowell (Stepped)

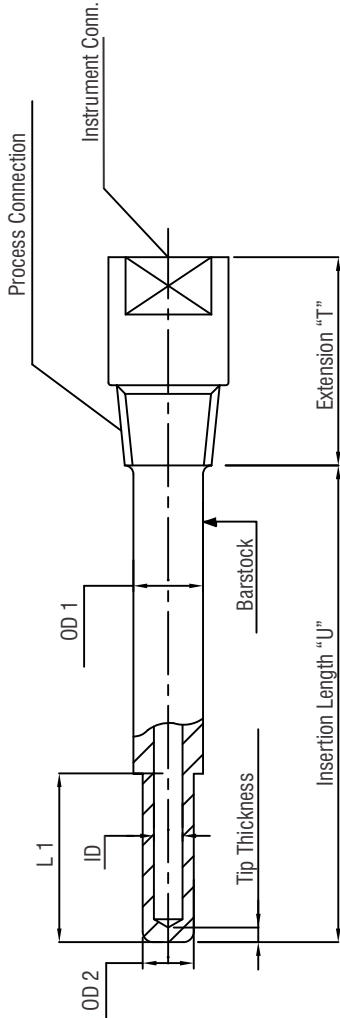

Other Options	
0	None
1	Plug & Chain
2	IBR
3	Radiography Test (RT) for Bore Concentricity
4	Ultrasonic Test (UT) for Bore Concentricity
5	NACE to MR-01-75/-MR-01-03

TWBT - 03

S4S	SS304	825	Incoloy® 825
S6S	SS316	600	Inconel® 600
310	SS310	800	Incoloy® 800
446	SS446	321	SS321
S4L	SS304L	KAN	Kanthal
S6L	SS316L	HCC	Hastelloy® C-276
CST	CS	HCB	Hastelloy® B
410	SS410	MN4	Monel® 400
S7S	SS317	MN5	Monel® 500
S7L	SS317L	TI2	Ti-II
N20	Nickel 200		
**Special material on Request			

Thermowell Material

Thermowell Head Dia

Thermowell OD 1 (Cold End)

Thermowell OD 2 (Hot End)

Bore ID

Instrument Connection

Process Connection

Insertion Length ("U")

Stepped Length ("L1")

Extension Length ("T")

Tip Thickness

Pl. Specify in mm*

Pl. Specify in mm

Pl. Specify in mm

Pl. Specify in mm

THREADED - T

Size	Code	Type	Code	M / F	Code
1/4"	06	NPS	NS	M	M
3/8"	10	NPT	NT	F	F
1/2"	15	BSP	BP		
3/4"	20	BSPT	BT		
1"	25	JIS-PF	PF		
1-1/2"	40	JIS-PT	PT		
2"	50	Gas	GS		
M20	M20	R	RR		
M24	M24	Rp	RP		
M27	M27	Pitch 1.5	C		
M33	M33	Pitch 2	D		

Pl. Specify in mm

Pl. Specify in mm

Pl. Specify in mm

Pl. Specify in mm

* for Hexagonal Head, please specify the AF size in mm e.g. code: HEX36AF

Ordering Example:- TWBT03-S6S-36-24-18-11-T15NTF-T25NTM-300-100-60-5-1