


Double Block & Bleed Gauge Valves

General


Model No. 2 GIV

Designed for use with Gauges, switches or Pressure Transmitter.

These Gauge Valve incorporates Two-Valve with single outlet that combines isolation, calibration and venting.

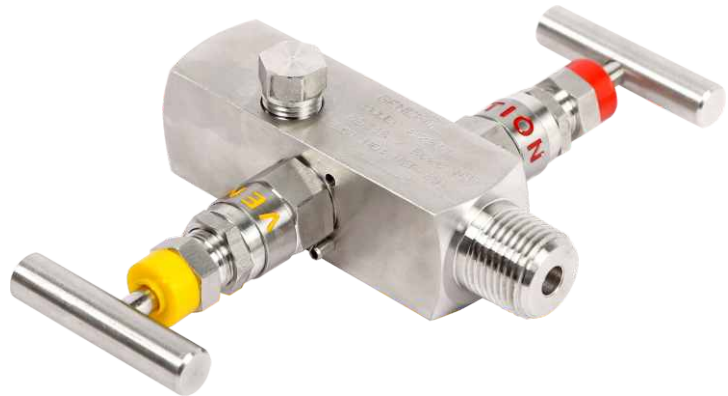

Description

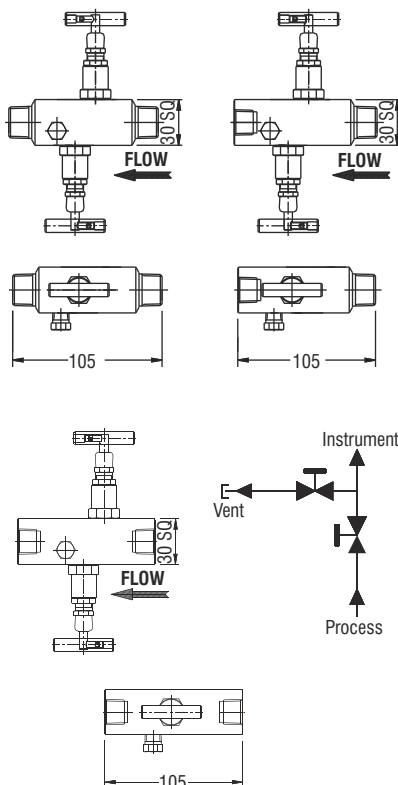

Test Pressure

@ 25°C Room Temperature
 Hydrostatic : Body - 415 bar(g)
 Seat - 415 bar(g)
 Pneumatic : Seat - 7 bar(g)

Gland Packing

PTFE : Standard
 Graphoil : Temperatures above 200°C

Material

A105, A 479 304, A 479 316,
 A182 GR F 316, Monel, Hastelloy, Duplex

Finish

CS zinc plated. SS Natural

Connections

(INLET x OUTLET)

1/2" MNPT x 1/2" MNPT
 1/2" MNPT x 1/2" FNPT
 1/2" FNPT x 1/2" MNPT
 1/2" FNPT x 1/2" FNPT
 3/4" MNPT x 1/2" FNPT

PART No.

G8-2 GIV.M.N.D
 G8-2 GIV.M/F.N.D
 G8-2 GIV.F/M.N.D
 G8-2 GIV.F.N.D
 G12-8-2 GIV.M/F.N.D

Note: Also available with BSP and BSP Taper Pipe Threads bigger pipe connections on request.

Note: Drawings, Dimensions and other information are subject to change without notice, as a part of our continues research and development.