



Accessories



MODEL : ACC-G2VM1

2 Valve Manifold

Two valve manifold is designed in a single block with male or female screwed inlet and outlet ports combining isolation valve and calibration / vent valve. Generally used on static pressure Transmitters, Switches and Gauges.

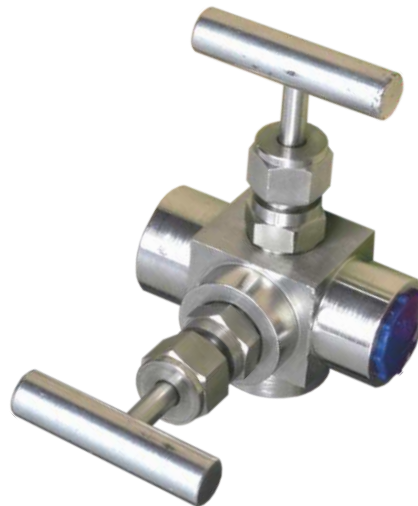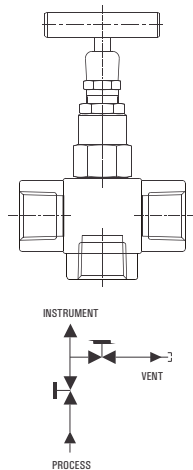

Ordering Information

MODEL

ACC- [] [] [] [] [] []

ITEM DESCRIPTION

G2VM1 2 Valve Manifold

MATERIAL

- CST** Carbon Steel
- S4S** SS 304
- S4L** SS 304L
- S6S** SS 316
- S6L** SS 316L
- 321** SS 321
- MN4** Monel
- HCC** Hastelloy-C
- XXX** Other (Please specify)

OPTION

- NAC** NACE
- OXY** O2 Cleaning
- L** Nil
- XXX** Other (Please specify)

DRAIN CONNECTION

Please Select from following table

INSTRUMENT CONNECTION

Please Select from following table

PROCESS CONNECTION

Please Select from following table

CONNECTION

Conn	Code	SIZE	Code	Type	Code	Male/ Female	Code
Thread	T	1/4"	06	NPS	NS	Male	M
		3/8"	10	NPT	NT	Female	F
		1/2"	15	BSP	BP		
		3/4"	20	BSPT	BT		
		1"	25	JIS-PF	PF		
		M20	M20	JIS-PT	PT		
				Gas	GS		
				R	RR		
		Rp	RP				
		Pitch 1.5	C				

Note: This catalogue indicates the general specifications used for most of the process applications. Any other specification not appearing here also can be provided as per customer requirement.

Sample Model Code: ACC-G2VM1-S6S-T15NTF-T15NTF-T15NTF-L